



# PUNCHING METAL

建材用アルミパンチングメタル金型パターン

パンチング屋どっとネット / 稲田金網株式会社 <http://www.punchingya.net>




建材用アルミパンチングメタル金型パターン

丸穴 (60 度千鳥配列) 金型パターンは原寸大で表示しています。 ①



inadakanaami NO.31

| 3.0Øx5.0P 60° チドリ 32.58% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   |     |     |

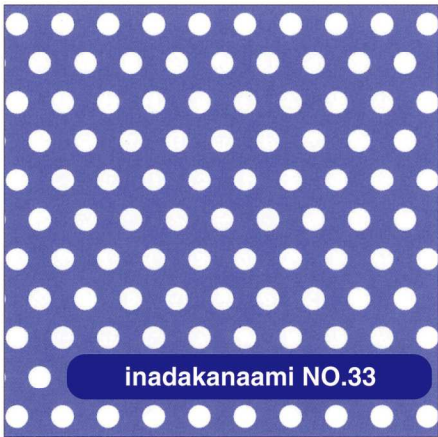


inadakanaami NO.33

| 3.0Øx6.0P 60° チドリ 22.63% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   | ●   |     |




inadakanaami NO.36

| 4.0Øx7.0P 60° チドリ 29.55% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   |     |     |

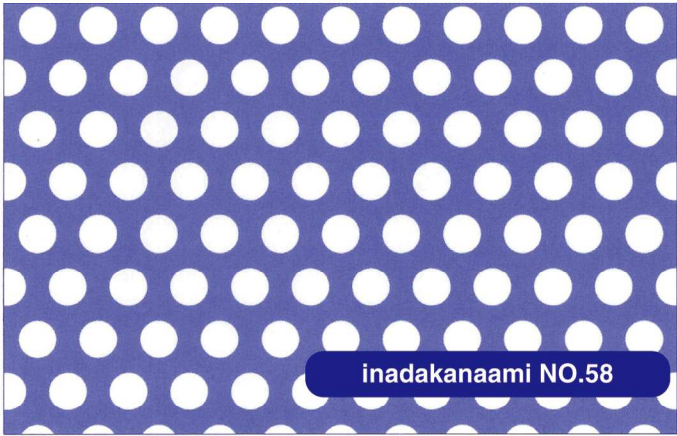


inadakanaami NO.58

| 5.0Øx8.0P 60° チドリ 35.35% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   | ●   | ●   |

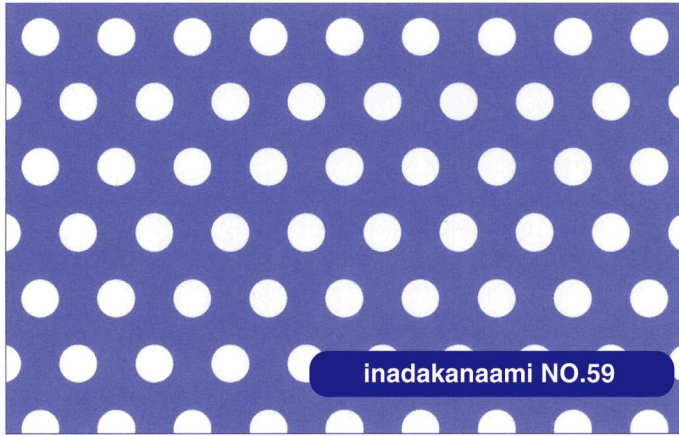


inadakanaami NO.59

| 5.0Øx10.0P 60° チドリ 22.63% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

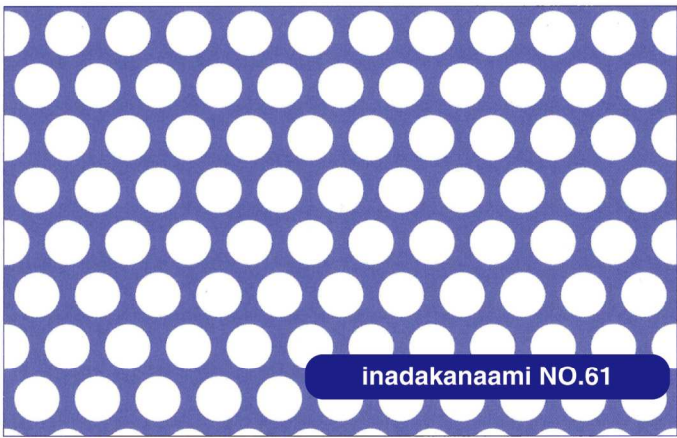

inadakanaami NO.61

| 6.0Øx8.0P 60° チドリ 50.90% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   |     |     |

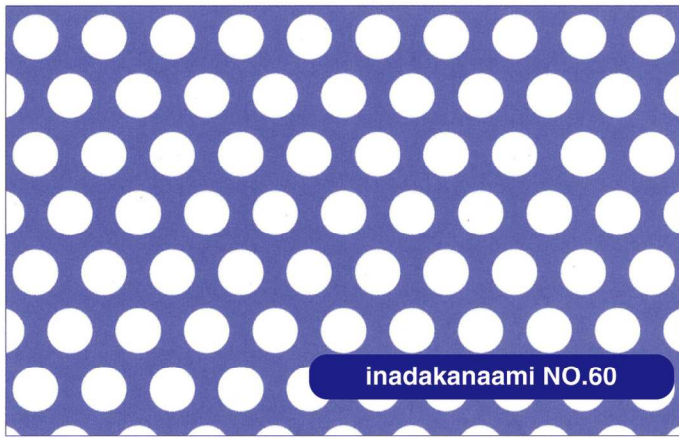

inadakanaami NO.60


| 6.0Øx9.0P 60° チドリ 40.22% |     |     |     |     |
|--------------------------|-----|-----|-----|-----|
| 板厚                       | 1.5 | 2.0 | 2.5 | 3.0 |
|                          | ●   | ●   | ●   | ●   |



# 建材用アルミパンチングメタル金型パターン


丸穴 (60 度千鳥配列) 金型パターンは原寸大で表示しています。

②

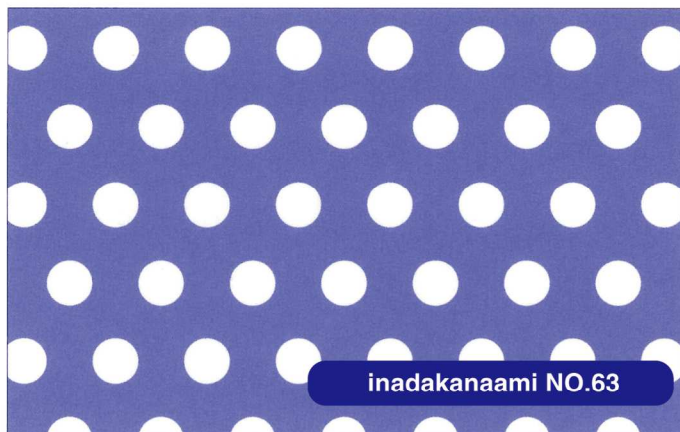


inadakanaami NO.63

| 6.0Øx12.0P 60° チドリ 22.63% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

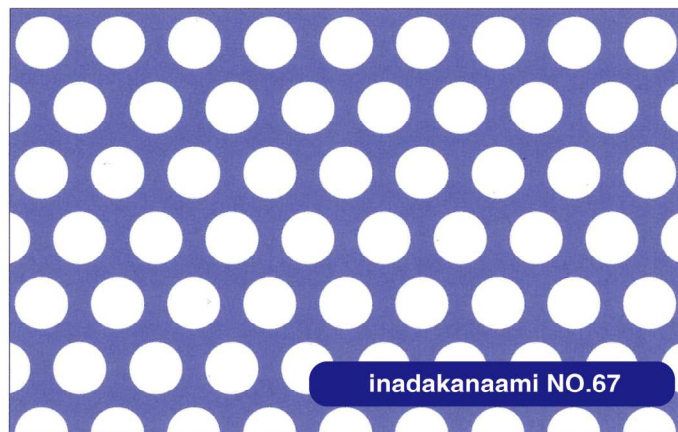


inadakanaami NO.67

| 7.0Øx10.0P 60° チドリ 44.35% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

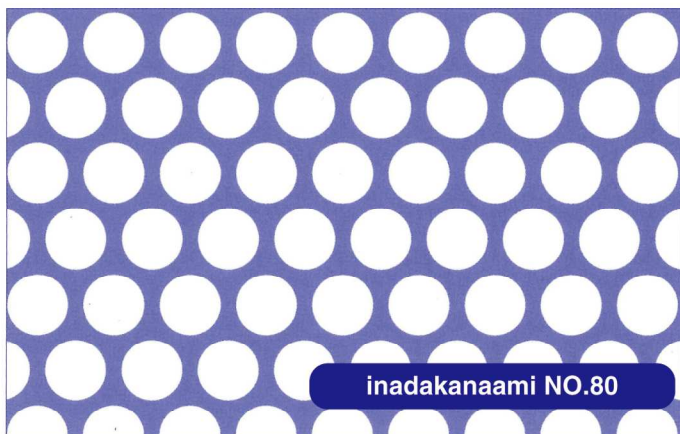


inadakanaami NO.80

| 8.0Øx10.0P 60° チドリ 57.92% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

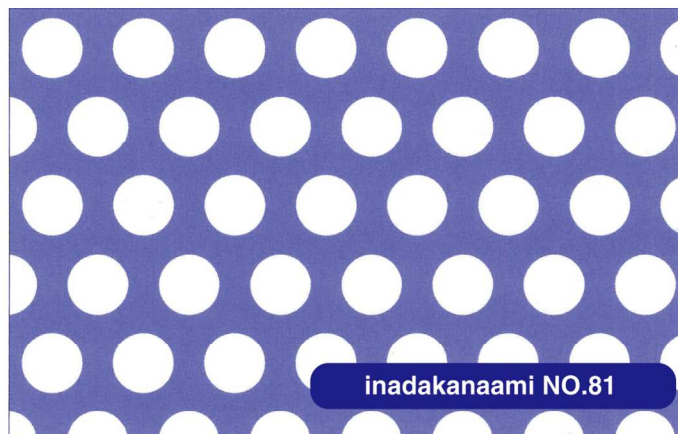


inadakanaami NO.81

| 8.0Øx12.0P 60° チドリ 40.22% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   | ●   | ●   |

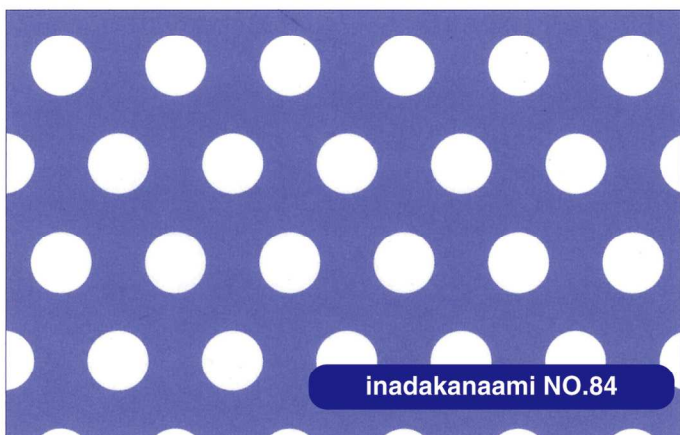

inadakanaami NO.84

| 8.0Øx15.0P 60° チドリ 25.74% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

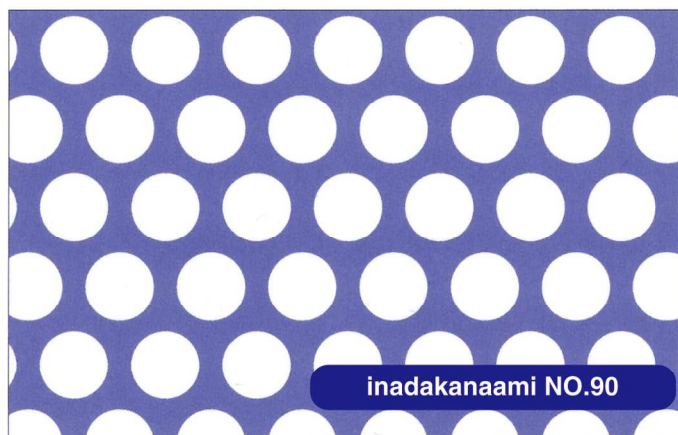

inadakanaami NO.90

| 9.0Øx12.0P 60° チドリ 50.91% |     |     |     |     |
|---------------------------|-----|-----|-----|-----|
| 板厚                        | 1.5 | 2.0 | 2.5 | 3.0 |
|                           | ●   | ●   |     |     |

※材質が鉄またはステンレスの場合別途お問い合わせ下さい。


inadakanaami



# 建材用アルミパンチングメタル金型パターン

丸穴 (60 度千鳥配列) 金型パターンは原寸大で表示しています。

③

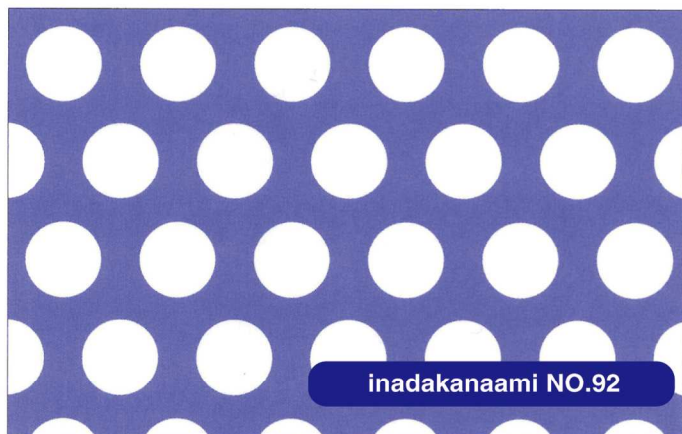


inadakanaami NO.92

| 10.0Ø x15.0P 60° チドリ 40.22% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   | ●   | ●   |




inadakanaami NO.93-D

| 10.0Ø x20.0P 60° チドリ 22.63% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   |     | ●   |

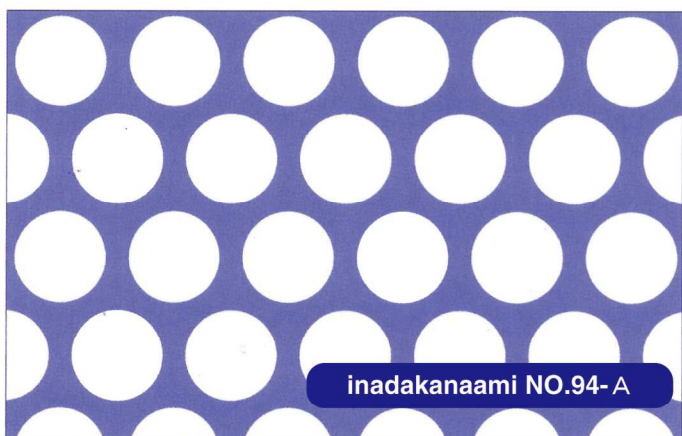


inadakanaami NO.94-A

| 12.0Ø x15.0P 60° チドリ 57.92% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   |     |     |

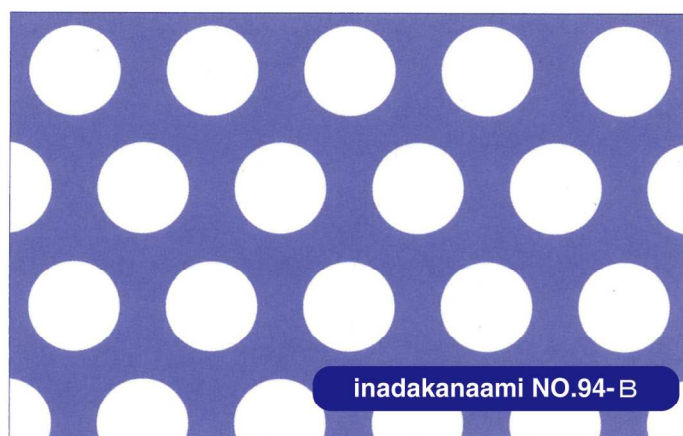

inadakanaami NO.94-B

| 12.0Ø x18.0P 60° チドリ 40.22% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   |     | ●   |

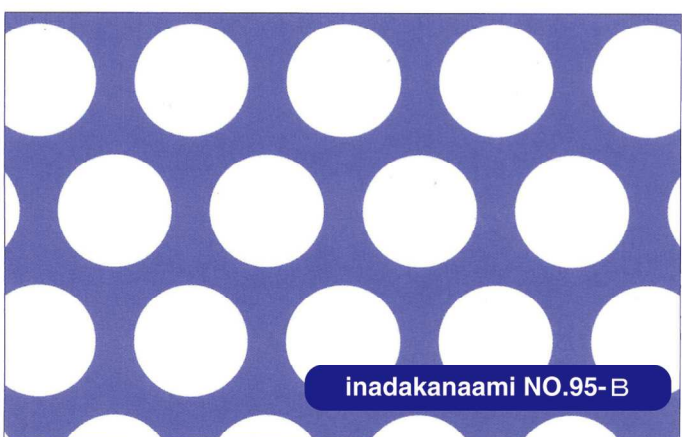

inadakanaami NO.95-B

| 15.0Ø x20.0P 60° チドリ 50.91% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   | ●   | ●   |



inadakanaami NO.97

| 20.0Ø x30.0P 60° チドリ 40.22% |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   | ●   | ●   |

※材質が鉄またはステンレスの場合別途お問い合わせ下さい。

inadakanaami




建材用アルミパンチングメタル金型パターン


丸穴（並列配列） 金型パターンは原寸大で表示しています。



|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 5.0Ø x10.0P 並列 19.64% |     |     |     |     |
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   | ●   | ●   |

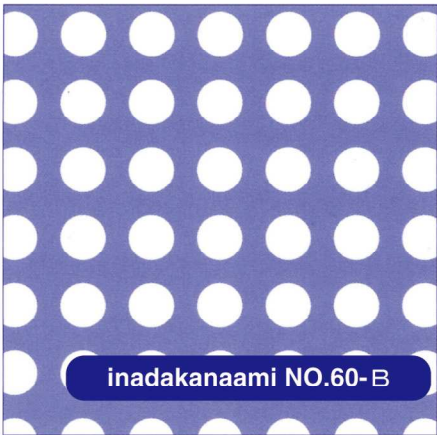

|                      |     |     |     |     |
|----------------------|-----|-----|-----|-----|
| 6.0Ø x9.0P 並列 34.91% |     |     |     |     |
| 板厚                   | 1.5 | 2.0 | 2.5 | 3.0 |
|                      | ●   | ●   | ●   |     |

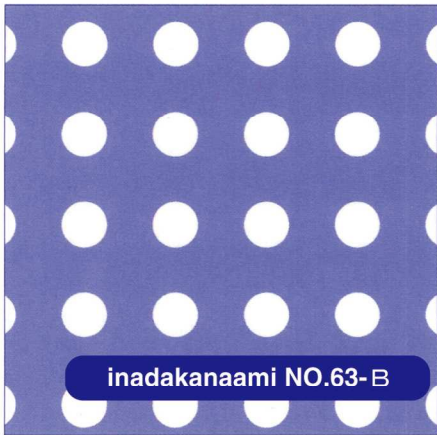


|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 6.0Ø x12.0P 並列 19.64% |     |     |     |     |
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   | ●   |     |




|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 8.0Ø x13.0P 並列 29.74% |     |     |     |     |
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |




|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 8.0Ø x16.0P 並列 19.64% |     |     |     |     |
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |

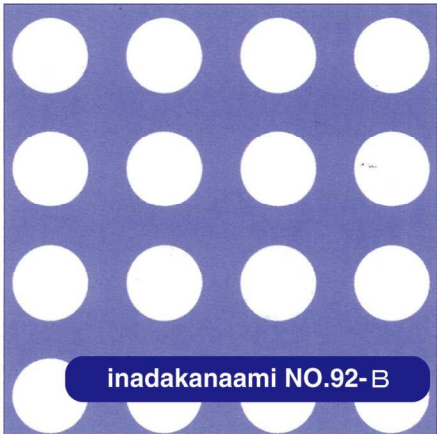

|                        |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 10.0Ø x15.0P 並列 34.91% |     |     |     |     |
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   | ●   | ●   |

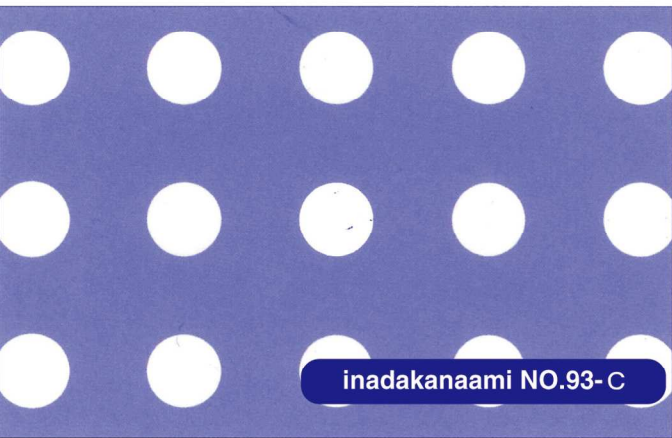

|                        |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 10.0Ø x20.0P 並列 19.64% |     |     |     |     |
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   | ●   | ●   |

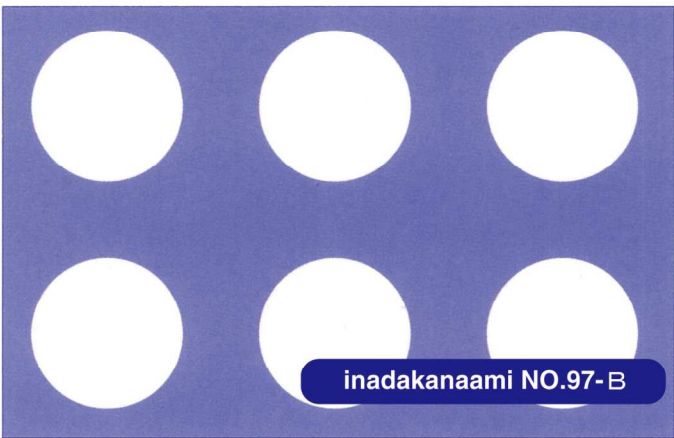


|                        |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 20.0Ø x30.0P 並列 34.91% |     |     |     |     |
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   | ●   | ●   |




建材用アルミパンチングメタル金型パターン


丸穴 (45 度角千鳥配列) 金型パターンは原寸大で表示しています。 ⑤

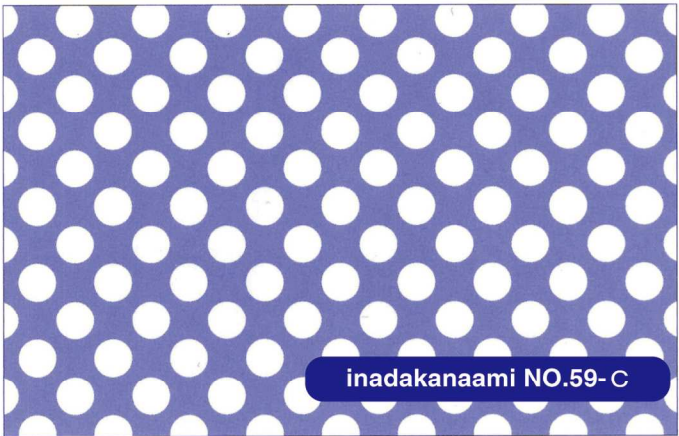


|                            |     |     |     |     |
|----------------------------|-----|-----|-----|-----|
| 5.0Ø x10.0P 45° チドリ 39.27% |     |     |     |     |
| 板厚                         | 1.5 | 2.0 | 2.5 | 3.0 |
|                            | ●   | ●   |     |     |

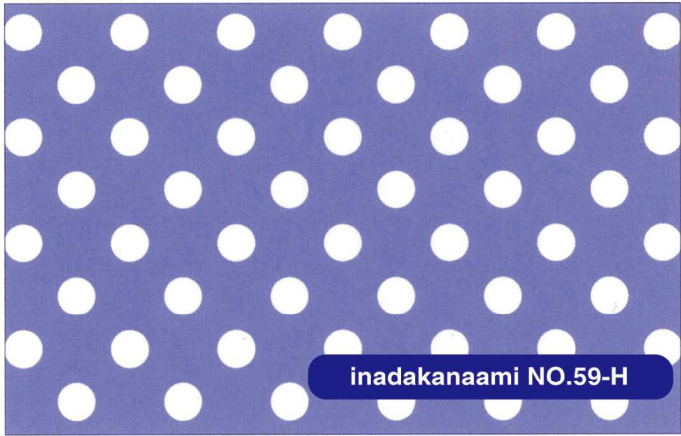


|                            |     |     |     |     |
|----------------------------|-----|-----|-----|-----|
| 5.0Ø x14.0P 45° チドリ 20.04% |     |     |     |     |
| 板厚                         | 1.5 | 2.0 | 2.5 | 3.0 |
|                            | ●   | ●   |     |     |

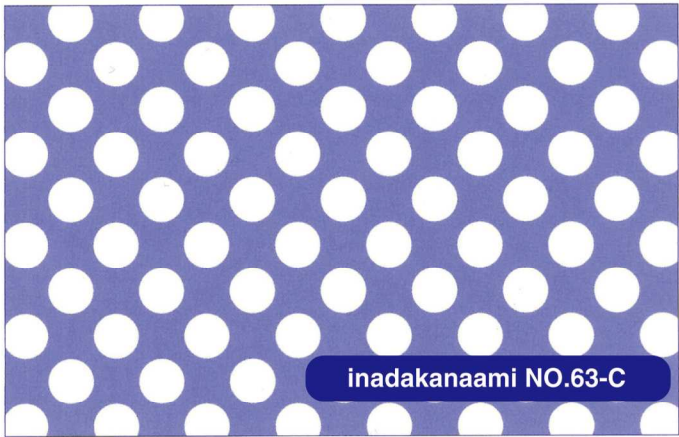


|                            |     |     |     |     |
|----------------------------|-----|-----|-----|-----|
| 6.0Ø x12.0P 45° チドリ 39.27% |     |     |     |     |
| 板厚                         | 1.5 | 2.0 | 2.5 | 3.0 |
|                            | ●   | ●   |     |     |

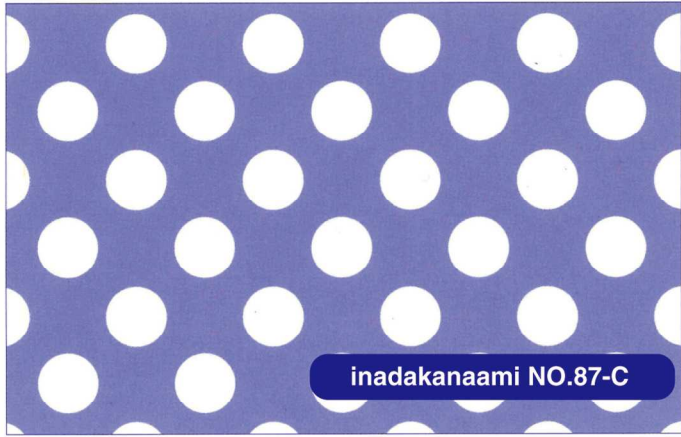

|                            |     |     |     |     |
|----------------------------|-----|-----|-----|-----|
| 8.0Ø x18.0P 45° チドリ 31.03% |     |     |     |     |
| 板厚                         | 1.5 | 2.0 | 2.5 | 3.0 |
|                            | ●   | ●   |     |     |

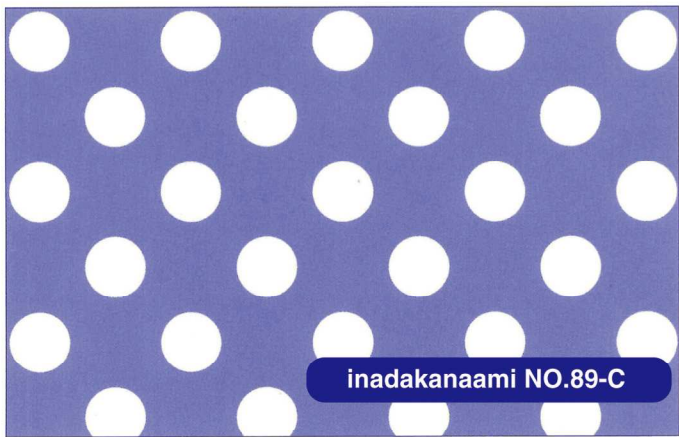

|                            |     |     |     |     |
|----------------------------|-----|-----|-----|-----|
| 8.0Ø x20.0P 45° チドリ 25.13% |     |     |     |     |
| 板厚                         | 1.5 | 2.0 | 2.5 | 3.0 |
|                            | ●   | ●   | ●   | ●   |

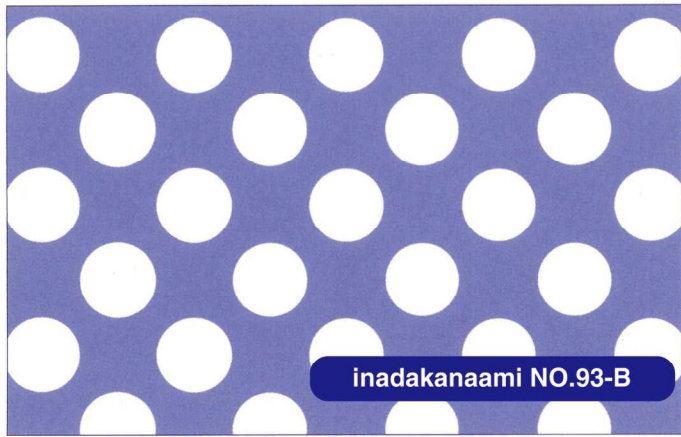


|                             |     |     |     |     |
|-----------------------------|-----|-----|-----|-----|
| 10.0Ø x20.0P 45° チドリ 39.27% |     |     |     |     |
| 板厚                          | 1.5 | 2.0 | 2.5 | 3.0 |
|                             | ●   | ●   | ●   | ●   |



建材用アルミパンチングメタル金型パターン


角穴（並列配列） 金型パターンは原寸大で表示しています。

⑥

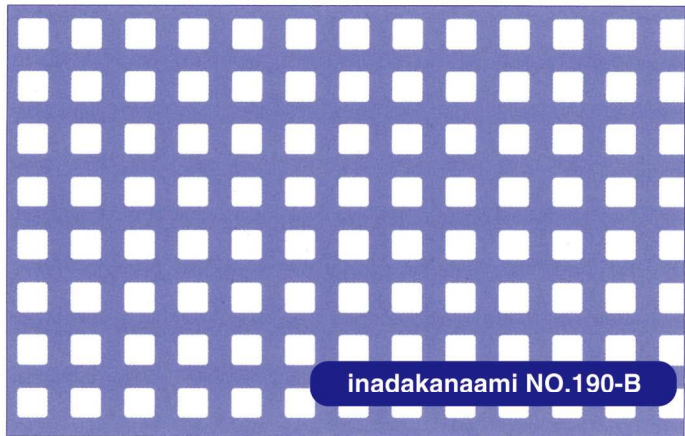


inadakanaami NO.190-B

| 4.0□ x7.0P 並列 32.65% |     |     |     |     |
|----------------------|-----|-----|-----|-----|
| 板厚                   | 1.5 | 2.0 | 2.5 | 3.0 |
|                      | ●   | ●   |     |     |

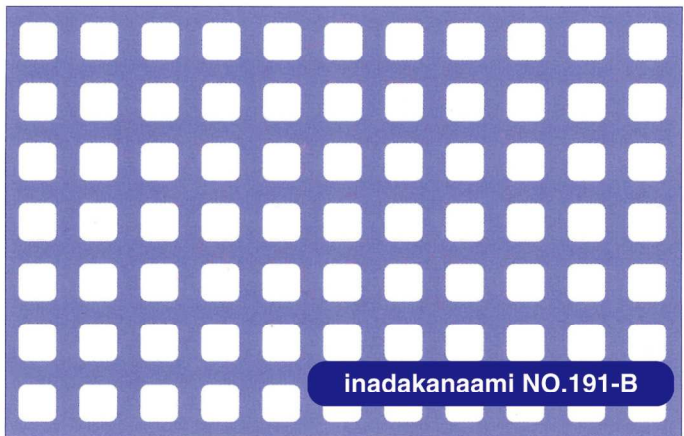


inadakanaami NO.191-B

| 5.0□ x8.0P 並列 39.06% |     |     |     |     |
|----------------------|-----|-----|-----|-----|
| 板厚                   | 1.5 | 2.0 | 2.5 | 3.0 |
|                      |     | ●   |     |     |

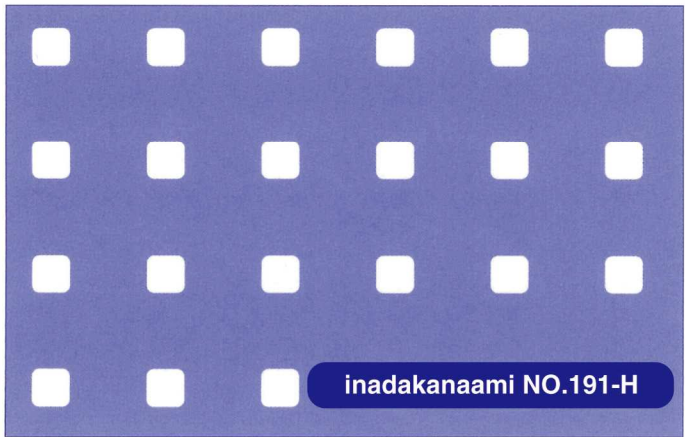


inadakanaami NO.191-H

| 5.0□ x15.0P 並列 11.11% |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |

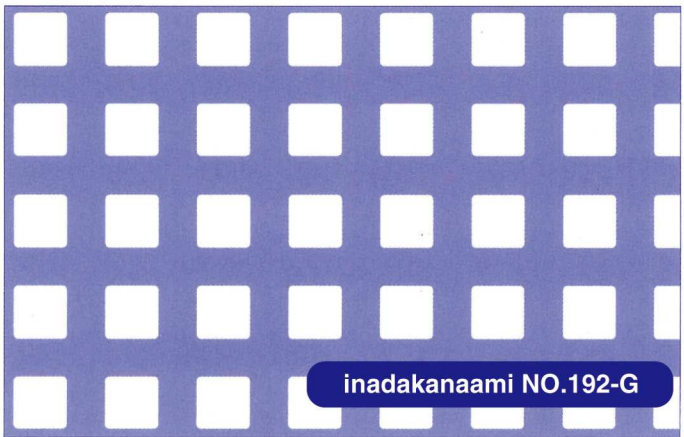


inadakanaami NO.192-G

| 7.0□ x12.0P 並列 34.03% |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |

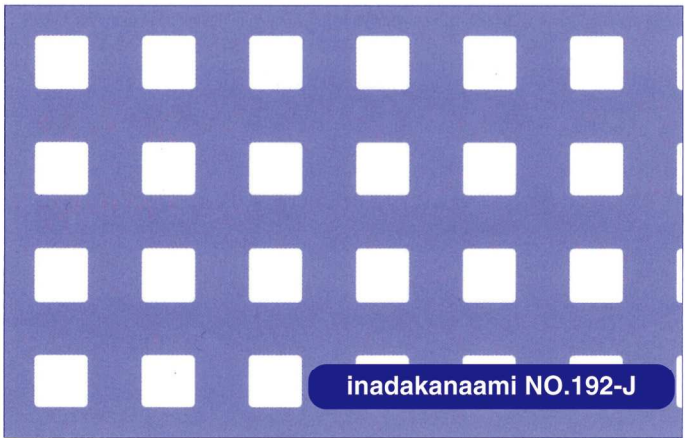

inadakanaami NO.192-J

| 7.0□ x14.0P 並列 25.00% |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |

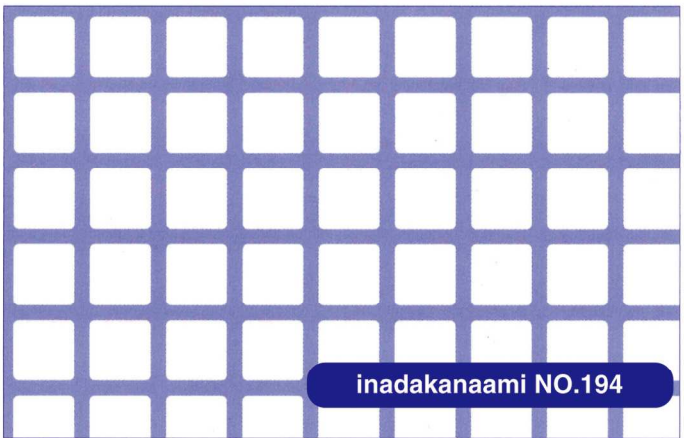


inadakanaami NO.194


| 8.0□ x10.0P 並列 64.00% |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   |     |     |

建材用アルミパンチングメタル金型パターン


角穴（並列配列） 金型パターンは原寸大で表示しています。

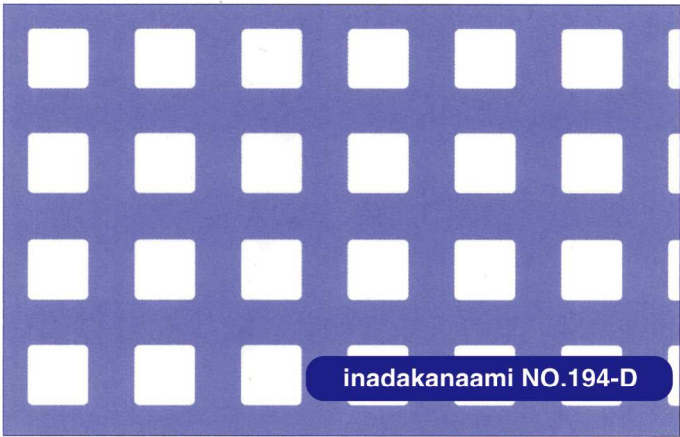


| 8.0□ x14.0P 並列 32.65% |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| 板厚                    | 1.5 | 2.0 | 2.5 | 3.0 |
|                       | ●   | ●   | ●   |     |

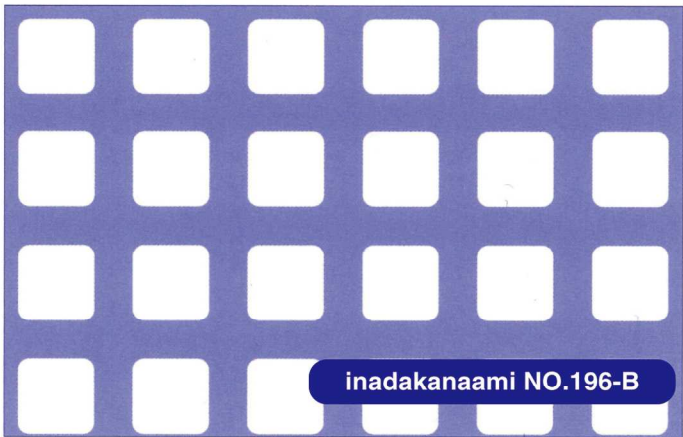


| 10.0□ x15.0P 並列 44.45% |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   | ●   | ●   |

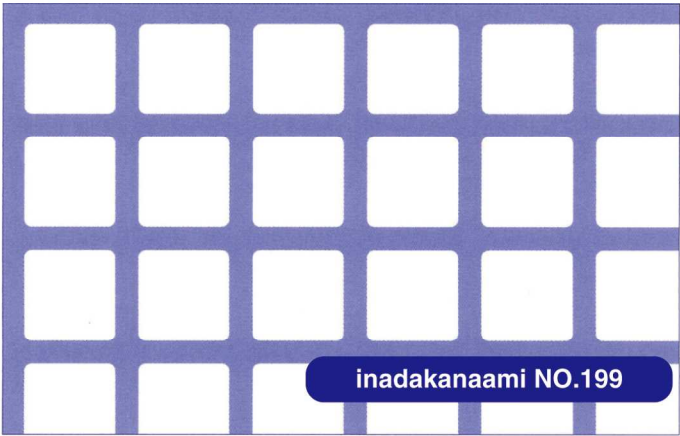

| 12.0□ x15.0P 並列 64.00% |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   |     |     |

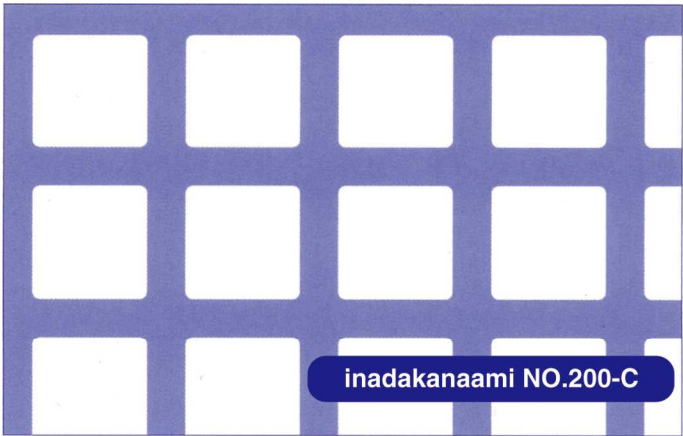

| 15.0□ x20.0P 並列 56.25% |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   |     |     |

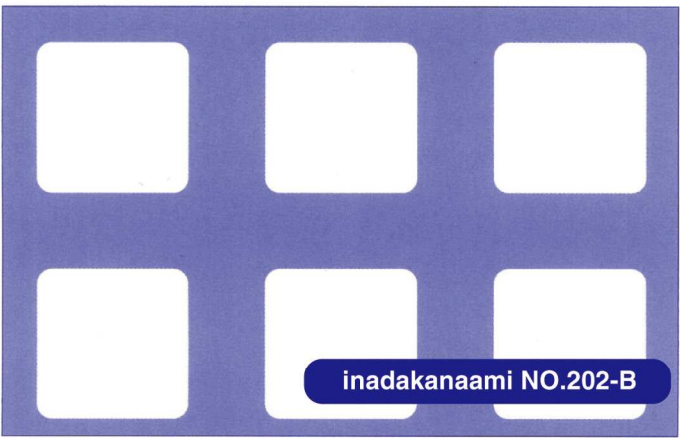


| 20.0□ x30.0P 並列 44.45% |     |     |     |     |
|------------------------|-----|-----|-----|-----|
| 板厚                     | 1.5 | 2.0 | 2.5 | 3.0 |
|                        | ●   | ●   |     |     |




建材用アルミパンチングメタル金型パターン


長穴（並列配列） 金型パターンは原寸大で表示しています。 ⑧

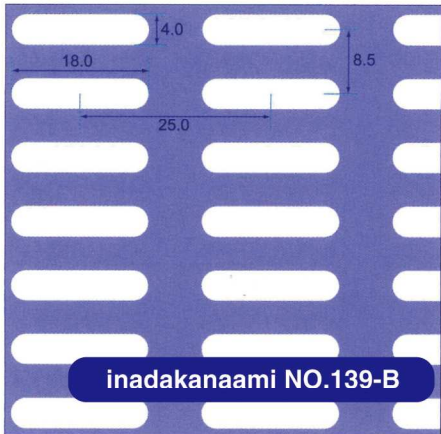


|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 4.0-18.0長穴 並列 |     | 32.27% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      |     |     |  |

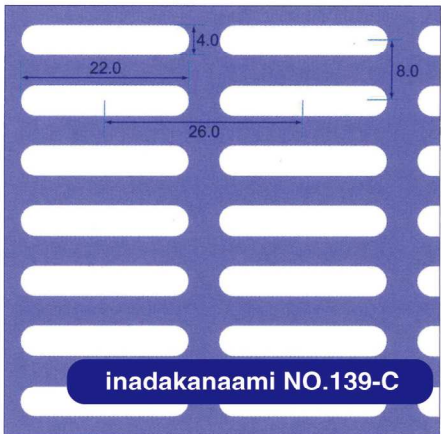


|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 4.0-22.0長穴 並列 |     | 40.66% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      | ●   |     |  |

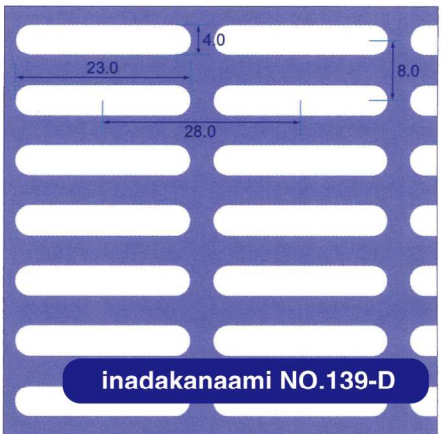


|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 4.0-23.0長穴 並列 |     | 39.54% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      | ●   | ●   |  |

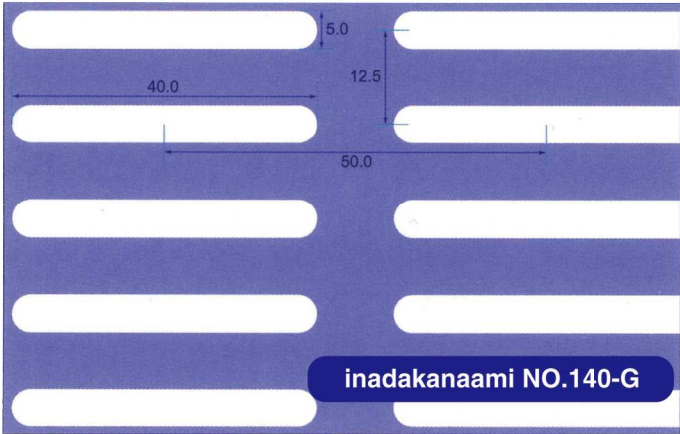


|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 5.0-40.0長穴 並列 |     | 31.14% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      | ●   | ●   |  |

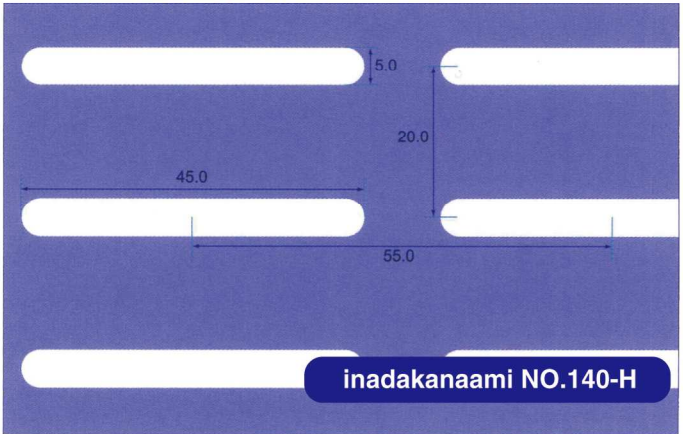

|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 5.0-45.0長穴 並列 |     | 19.97% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      | ●   |     |  |

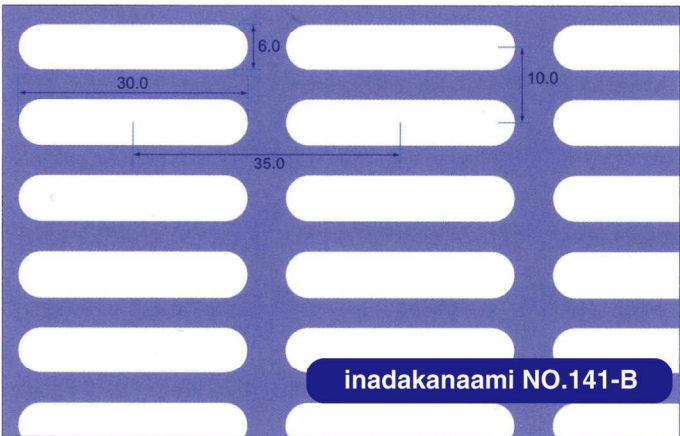

|               |     |        |     |     |  |
|---------------|-----|--------|-----|-----|--|
| 6.0-30.0長穴 並列 |     | 49.22% |     |     |  |
| 板厚            | 1.5 | 2.0    | 2.5 | 3.0 |  |
|               | ●   | ●      |     |     |  |

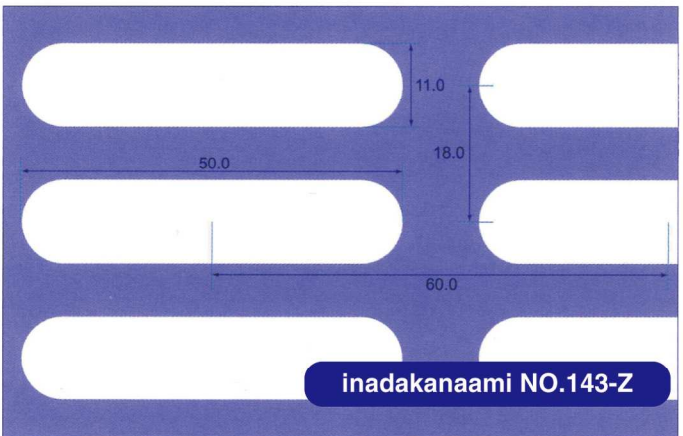

|                |     |        |     |     |  |
|----------------|-----|--------|-----|-----|--|
| 11.0-50.0長穴 並列 |     | 48.52% |     |     |  |
| 板厚             | 1.5 | 2.0    | 2.5 | 3.0 |  |
|                | ●   | ●      | ●   |     |  |



稲田金網株式会社 〒542-0063 大阪市中央区東平2丁目3番12号  
TEL 06-6763-1201(代) FAX 06-6763-1204

パンチングメタル & 金網なら稲田金網 HP へ <http://www.inadakanaami.jp>  
当社へのメールでのお問い合わせは mail : [eigyoubu@inadakanaami.jp](mailto:eigyoubu@inadakanaami.jp)